



# VG 61 DEFENDER

## TUNG OIL WOOD PRIMER


A tung and linseed oil wood primer and coating for protecting exterior timber.

It is particularly indicated for yacht application or for the protection of wood near the sea or in mountain.

Applying two to three coats of VG 61 DEFENDER on its own gives a fantastic finish or one coat can be applied to act as a good primer prior to applying varnish.

The surface must be clean, dry and free from any dust prior to application.

When painting in the open-air, the coat must be dry before nightfall.

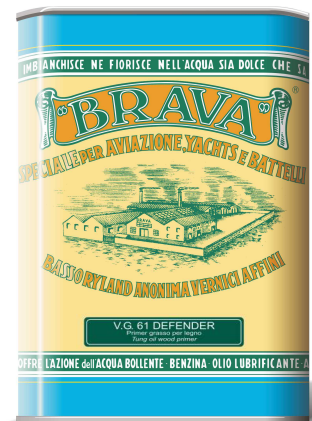

thinner:	white spirit"
coverage:	15/20 MQ/LT
touch drying:	12 h
overcoating:	24 h.
suggested n° coats:	2
dry film thickness:	25 microns
solids content:	35%
flash point:	37° C.
specific weight:	0,92
airless:	30/1 - 0.017 - 0.019
spry:	2 - 3 Kg/cm <sup>2</sup> - 1.2 - 1.4

### AVAILABLE:

500 ml tin  
1 liter tin

#### U.K. Importer:



MARINE & INDUSTRIAL LLP,  
Station Road, Worstead, North Walsham, NR28 9RZ.  
Tel: 01692 406822. Fax: 01692 406866.  
sales@marineindustrial.co.uk

